


PRODUCT TECHNICAL DATASHEET

B70/2B/BOX

Brushless 

Intensive use 




CODE	DESCRIPTION	PCS/PALLET
B70/2B/BOX	Digital control 24V only for 2 overhead doors automations BRUSHLESS (cod. BR41/830 or BR41/830/Q), in plastic box. With 2-channel radio receiver installed on board.	50

PRODUCT TECHNICAL SPECIFICATIONS

Power line supply	230V AC - 50 Hz
Stand-by consumption	0,5W
Operating temperature	-10+55 C°
Protection level	IP54
N. motors activated	2 Brushless motor BR41/830 or BR41/830/Q
Max power per motor	200W
Max courtesy light charge	2x5 W (24V DC)
Max power gate open light	3W (24V DC)
Max voltage accessories output	10W (24V DC)
Electrical-Lock max power	15W (12Vdc)
Flash light voltage	24V DC
Max flashing light charge	25W
Battery	Optional
Maximum dimension product in mm (L x W x H)	330 x 230 x 115
Product weight packed (Kg)	4,5
Number items per pallet/box	50

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

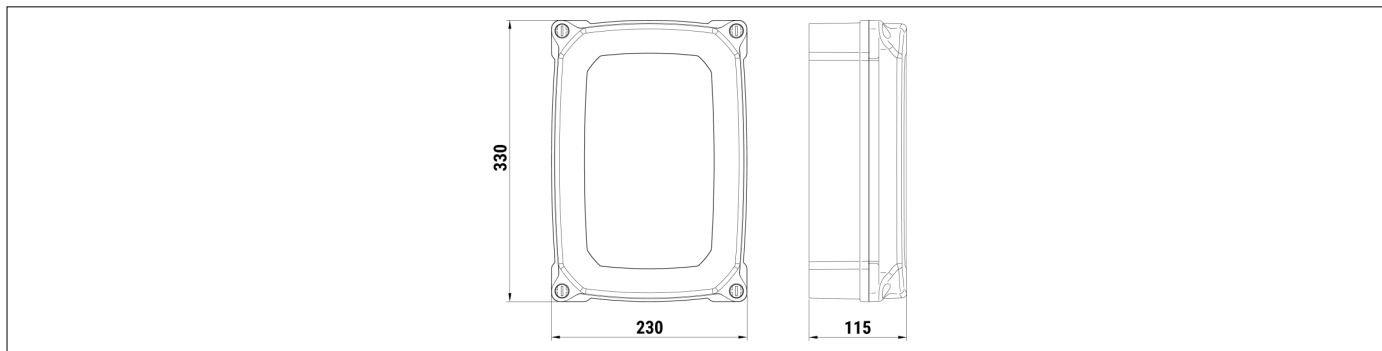

PRODUCT ACCESSORIES




B71/BC/INT

Kit for emergency batteries charger for Brushless digital controller 24V DC with plug-in card, with 2 recovery batteries 12V DC, 1,2 Ah. Box case included.



B71/BC/EXT

Kit for emergency batteries charger for Brushless digital controller 24V DC with plug-in card, with 2 recovery batteries 12V DC, 4.5 Ah. Box case included.



B71/BC/BOX

Kit for emergency batteries charger for Brushless digital controller 24V DC. Box case included, without recovery batteries.