

# PRODUCT TECHNICAL DATASHEET

## B70/2ML/BOX




CODE	DESCRIPTION	PCS/PALLET
<b>B70/2ML/BOX</b>	Digital control 24V for 2 BRUSHLESS motor, in plastic box. With 2-channel radio receiver installed on board.	50

### PRODUCT TECHNICAL SPECIFICATIONS

Power line supply	230V AC - 50 Hz
Stand-by consumption	0,5W
Operating temperature	-10+55 C°
Protection level	IP54
N. motors activated	2 Brushless motor
Max power per motor	110W
Max courtesy light charge	100W 230V AC - 40W 24V AC/DC
Max power gate open light	3W (24V DC)
Max voltage accessories output	10W (24V DC)
Electrical-Lock max power	15W (12V DC)
Flash light voltage	24V DC
Max flashing light charge	25W
Battery	Optional
Maximum dimension product in mm (L x W x H)	330 x 230 x 115
Product weight packed (Kg)	4,5
Number items per pallet/box	50

# PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

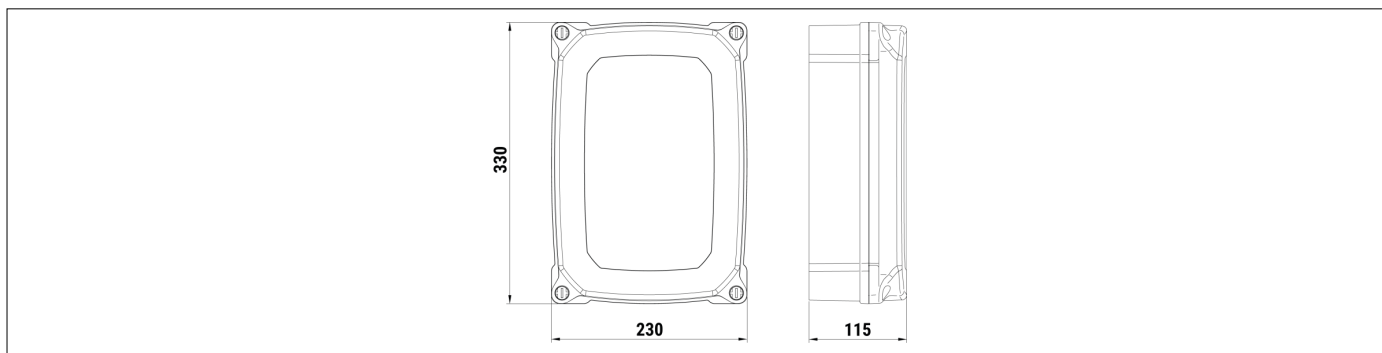

## PRODUCT ACCESSORIES




### B71/BC/INT

Kit for emergency batteries charger for Brushless digital controller 24V DC with plug-in card, with 2 recovery batteries 12V DC, 1,2 Ah. Box case included.



### B71/BC/EXT

Kit for emergency batteries charger for Brushless digital controller 24V DC with plug-in card, with 2 recovery batteries 12V DC, 4.5 Ah. Box case included.



### B71/BC/BOX

Kit for emergency batteries charger for Brushless digital controller 24V DC. Box case included, without recovery batteries.