

PRODUCT TECHNICAL DATASHEET

BI/004




CODE	DESCRIPTION	PCS/PALLET
BI/004	Barrier BRUSHLESS 36V DC for 3 or 4 m booms, with control unit and absolute encoder, irreversible, complete with xing plate with tie rods, boom fixing angles and flashing white LED light on header.	8

PRODUCT TECHNICAL SPECIFICATIONS	
Barriers	Up to 4 mt long
Power line supply	230V AC - 50 Hz
Motor power supply	36V DC
Power rating	220W
Frequency of use	Continue
Torque	0 - 200 N m
Operating temperature	- 20 + 55 C°
Protection level	IP54
Reductor Type	Irreversible
Opening time	2÷6 sec (up to 3 m) - 3÷6 sec (up to 4 m)
Onboard control unit	CTRL
Encoder	Digital native encoder + magnetic digital SENSORED, 4096 PPR
Accessories power supply	24V DC
Colour	Cabinet: painted RAL9006 arabesque grey - Head: black arabesque silver painted - Boom support: plastic RAL9005 - Boom: painted RAL9010 matt
Release system	STANDARD Key cylinder - Optional European Cylinder (Cod. RL670)
Batteries recovery	Available (optional)
BUS synchronization Master/Slave	Yes


Operating cycles per day (opening/closing - 24 hours no stop)	5000
Maximum dimension product in mm (L x W x H)	280 x 210 x 1203
Product weight packed (Kg)	46,2
Number items per pallet/box	8

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

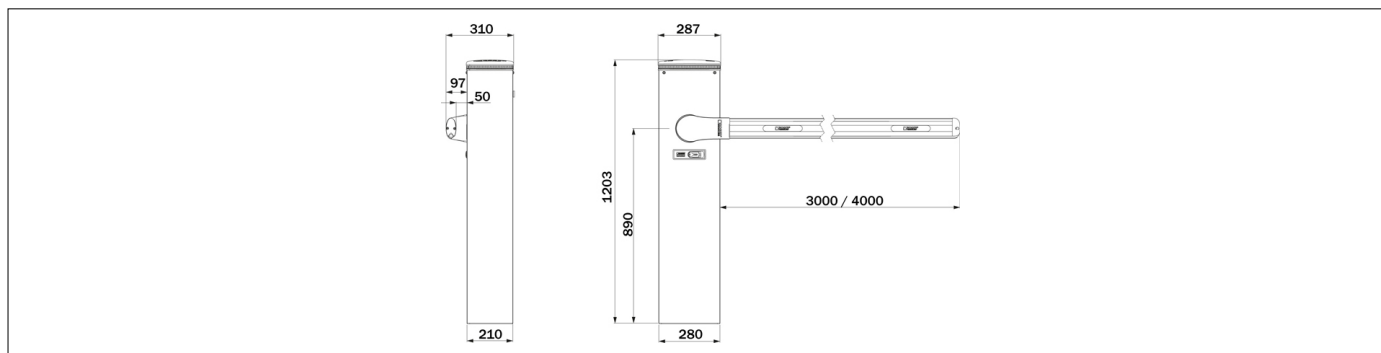

DIMENSIONS


PRODUCT ACCESSORIES




SP/48/01
Spring diameter 48 mm for barriers.



SP/48/G14
Spring diameter 48 mm only for BI/004 with boom less than 2.2 m.



SP/61/01
Spring diameter 61 mm for barriers.




SP/72/01
Spring diameter 72 mm for barriers.




BA/68/3
White painted aluminum boom, 3 meters long, with LED cover profile and impact resisting rubber profile.




BA/68/4
White painted aluminum boom, 4 meters long, with LED cover profile and impact resisting rubber profile.




SND/BA/68/DW
Articulated joint 90° with lower tie rod for boom BA/68.



SND/BA/68/UP
Articulated joint 90° with upper tie rod for boom BA/68.



SND/BA/68/UP/RD
Articulated joint 90° with upper tie rod (lowered version) for boom BA/68.



BARK/02
Painted aluminum skirting, with stainless steel screws mounted on bronze bushings. Single module length 2 meters.



ACS/BA/60
Break-away system for barrier, compatible only with BA/60/3 boom arm.



ACS/BA/68
Break-away system for barrier, compatible with BA/68/3 and BA/68/4 boom arm.



KT247
Support for rectangular boom for BI/004 up to 4 m and max. 3.6 kg.




ALED/4C
4-metre LED strip with connection cable for barrier boom (red colour).



ALED/4C/RGB
4-metre multicoloured RGB LED (red, green + other colours) strip with connection cable for barrier boom.




BI/BLED/4/RGB
Multicoloured RGB LED strip (red, green + other colours) with connection cable for BI/004 barrier header.



BAFS/01
Fixed support with rubber, not adjustable, for booms.



BAFS/02
Fixed support with rubber, adjustable telescoping, for booms.




BAFS/03
Fixed support with rubber, not adjustable, with predisposition for bolt, for booms.




BAFS/04
Fixed support with rubber, adjustable telescoping, with predisposition for bolt, for booms.




BAFS/05
Adjustable fixed support with vandal-proof magnetic suction cup, complete with B72/DGS demagnetizer card, for booms.



BAMS/01
Mobile support for booms.



BAMS/01/EXT
Extension 20 cm for mobile support BAMS/01.




BI/BAT/KIT
Kit for emergency batteries charger for Brushless digital controller CTRL 36V DC with plug-in card, with 2 recovery batteries 12V DC, 4.5 Ah. Kit for BIONIK barrier.



BI/BCHP
Plug-in card, batteries charger, for Brushless digital controller CTRL 36V DC, without recovery batteries, for BIONIK barrier.



BT12V45
Battery 12V 4.5 Ah (1 pc.).



KT231
Fixing plate for fixed supports codes BAFS/01, BAFS/02, BAFS/03, BAFS/04, BAFS/05.



B73/EXP
Signal status board, 2 output for CTRL - CTRL/P.



B73/LTM
RGB boom light and traffic light control device for CTRL.



DLD1/24
Loop detector for 1 loop, 2 output, 24V AC/DC.




DLD2/24

Loop detector for 2 loops, 2 outputs +
output alarm, 24V AC/DC.



RL670

European cylinder key (DIN) for
release system series SMARTY-
BIONIK.



KT239

Kit DIN rail with magnetic supports.



KT242

Kit for cable passage with magnetic
support for barriers.



R99/BASB20

Pack of 20 reflective adhesive stickers
for boom barrier.



R99/BASB40

Pack of 40 stickers for barrier.